

Features

- Surface Mount 3 mm Square Single-Turn Cermet / Sealed
- Compatible with surface mount manufacturing processes
- Rotor stop for "in-circuit" adjustment
- 100 cycle rotational and seal life
- Plastic housing for RF applications
- Reverse pin layout option (Model 3313X)
- RoHS compliant* - see processing information on RoHS compliant surface mount trimmers
- For trimmer applications/processing guidelines, click here
- Halogen free models available**

3313 - 3 mm Trimpot Trimming Potentiometer

Electrical Characteristics

Standard Resistance Range	 10 ohms to 2 megohms (see standard resistance table)
Resistance Tolerance	 $\pm 20\%$ std.
End Resistance	 1 % or 3 ohms max. (whichever is greater)
Contact Resistance Variation	 3 % or 3 ohms
Adjustability	
Voltage Divider	 $\pm 0.1\%$
Rheostat	 $\pm 0.2\%$
Resolution	 Inf nite
Insulation Resistance	 500 vdc. 100 megohms min.
Dielectric Strength	
Sea Level	 500 vac
70,000 Feet	 350 vac
Adjustment Angle	 220° nom.

Environmental Characteristics

Max. Soldering Exposure	 260 °C/5 seconds
Power Rating (200 volts max.)	
70 °C	 0.125 watt
125 °C	 0 watt
Operating Temp. Range	 -55 °C to +125 °C
Temperature Coeff. cent	
..... ≤ 100 ohms ± 150 ppm/°C;	
..... > 100 ohms ± 100 ppm/°C	
Seal Test	 85 Fluorinert
Humidity	 MIL-STD 202, Method 106 (no vibration) TRS $\pm 3\%$; IR 10 megohms
Vibration	 20 G TRS $\pm 1\%$; VRS $\pm 1\%$
Shock	 100 G TRS $\pm 1\%$; VRS $\pm 1\%$
Load Life	 1000 hours
@ 70 °C Rated Power; TRS $\pm 3\%$	
Rotational Life	 100 cycles TRS $\pm 3\%$
Thermal Shock	 5 cycles TRS $\pm 2\%$; VRS $\pm 1\%$

Physical Characteristics

Mechanical Angle	 250 ° nom.
Torque	 50 g-cm max.
Stop Strength	 200 g-cm min.
Pushover Strength ("S" Style only)	 1.6 Kilograms (3.5 lbs) minimum
Flammability	 U.L. 94V-0
Weight	 Approx. 0.01 oz.
Marking	 Resistance code and date code
Wiper	 50 % (Actual TR) $\pm 10\%$
Standard Packaging	
J, X Styles	 1000 pcs./7 "reel
S Style	 200 pcs./7 "reel
Adjustment Tool	 H-91




Specifications are subject to change without notice.

Customers should verify actual device performance in their specific applications.


RoHS Directive 2002/95/EC Jan. 27, 2003 including annex and RoHS Recast 2011/65/EU June 8, 2011.

Halogen free product is identified by a black housing color. Bourns follows the prevailing definition of "halogen free" in the industry. Bourns considers a product to be "halogen free" if (a) the Bromine (Br) content is 900 ppm or less; (b) the Chlorine (Cl) content is 900 ppm or less; and (c) the total Bromine (Br) and Chlorine (Cl) content is 1500 ppm or less.


Product Dimensions

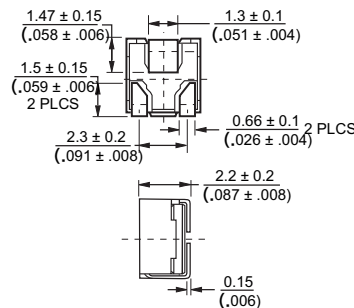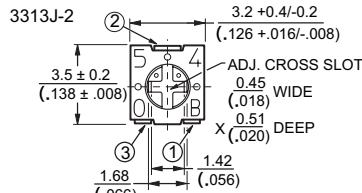






RECOMMENDED LAND PATTERN





3313X-1 (Reverse Pin Layout)



3313X-2 (Reverse Pin Layout)

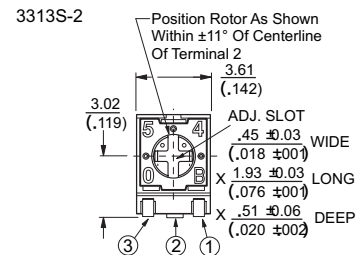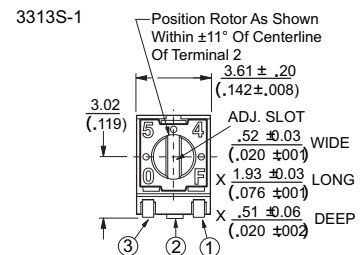

RECOMMENDED LAND PATTERN




DIMENSIONS: MM
(INCHES)


TOLERANCES: ± 0.25 EXCEPT WHERE NOTED
(.010)

3313 - 3 mm Trimpot Trimming Potentiometer

3313J, X Packaging Specifications

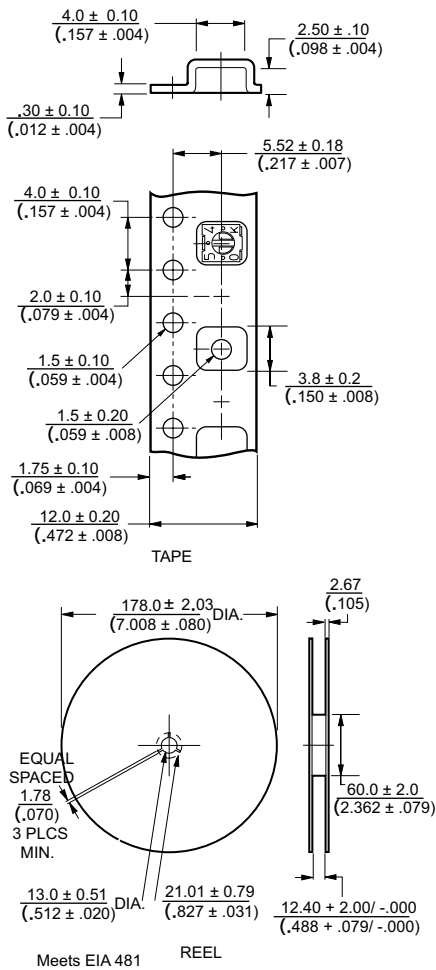

3313S Packaging Specifications

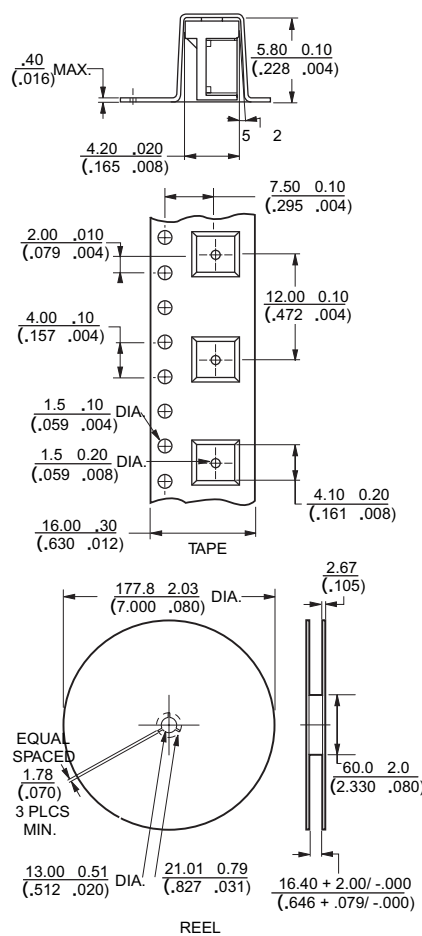

Standard Resistance Table

Resistance (Ohms)	Part Marking Code	Resistance Code
10	A1	100
20	21	200
50	51	500
100	A2	101
200	22	201
500	52	501
1,000	A3	102
2,000	23	202
5,000	53	502
10,000	A4	103
20,000	24	203
50,000	54	503
100,000	A5	104
200,000	25	204
500,000	55	504
1,000,000	A6	105
2,000,000	26	205

Popular distribution resistance values listed in boldface. Special resistances available.

How To Order

Model 3313 J - 1 - 502 E
 Style _____
 Standard or Modified _____
 Product Indicator _____
 -1 = Standard Single Slot
 -2 = Standard Cross Slot
 -GK2 = Halogen Free Single Slot (Black Housing Color)
 -GL5 = Halogen Free Cross Slot (Black Housing Color)
 Resistance Code _____
 Embossed Tape _____
 1000 pcs. / 7 ? Reel (J, X Styles)
 200 pcs. / 7 ? Reel (S Style)

DIMENSIONS: $\frac{\text{MM}}{(\text{INCHES})}$

TOLERANCES: $\pm \frac{0.25}{(.010)}$ EXCEPT WHERE NOTED

Specifications are subject to change without notice.
 Customers should verify actual device performance in their specific applications.