



STB 250A~600A 分流器 Shunts

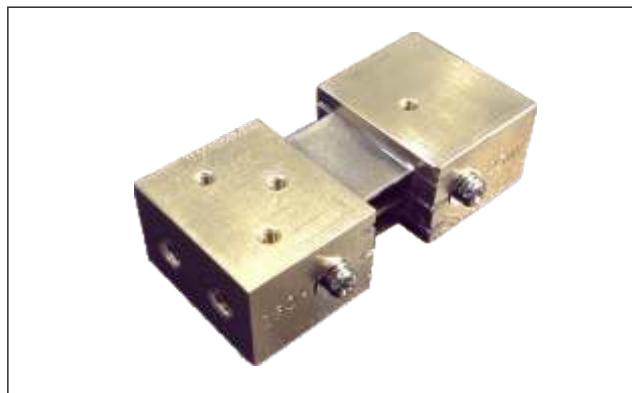

分流器为电子设备或系统提供准确的毫伏信号和电流信号，在过负荷保护、控制装置、仪器仪表、电源供应等领域，有广泛应用。

A range of direct current shunts which provides an accurate millivolt signal, exactly proportional to the system current. They can be used to drive ammeter indicators, overload protection and control devices, these shunts enable the measurement of D.C. current in ranges from 10A to 10000A with various output options available.

● 结构图 Construction

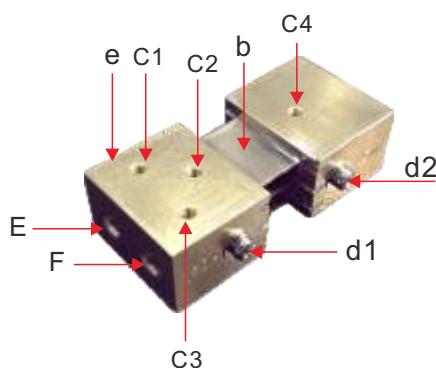

b	Precision manganin	精密锰铜
C1,C2,C3,C4	Input terminal	输入电流端
d1,d2	Output terminal	输出电压端
e	Copper base	铜座
EF	Fixed end	固定位置

● 特性 Features

- I 高可靠性 High reliability
- II 高过载能力 High over loading ability
- III 极低的电感 Extremely low inductance

● 应用范围 Applications


- I 用于扩大仪表的测量电流范围
Used for extending the current range of measure
- II 可用于均流或取样检测
Current balance or sampling for testing
- III 自动化控制的电源馈作限流
Automation control to limit the current

● 参考规格 Reference Standards

JIS C 5201-1

STB 250A~600A 分流器 Shunts

● 外形尺寸 Dimensions

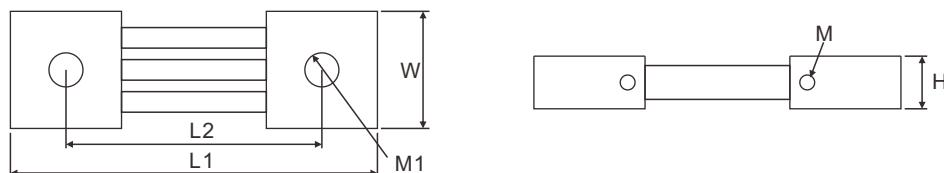

规格 TYPE	电压类型 Voltage type	电流 Current	尺寸 Dimensions(mm)					
			L1±1.0	L2±1.0	W±1.0	H±0.5	M1±0.3	M±0.3
STB	25mV	250A	116	86	41	12	4	10
		300A	115	83	35	18.5	4	13
		400A	115	83	44	18.5	4	13
		500A	115	83	55	18.5	4	13
		600A	122	88.5	55	21	4	13

● 性能 Performance

试验项目 Test Items	试验方法 Test Methods(JIS C 5201-1)
准确度等级 Accuracy class	0.5级
环境条件 Ambient temperature&Relative humidity	-40~+60°C 相对湿度≤95%(在35°C时) -40~+60°C Relative Humidity≤95% (at 35°C)
过载性能 Overload	额定电流的120%，2小时 Rating current 120%, 2h
输出电压 Voltage outputs	25mv
表面温升 Surface temperature rise	50A以下不超过80°C；50A以上不超过120°C Not beyond 80°C lower than 50A, not exceed 120°C if higher than 50A.
电阻温度系数 Temperature coefficient	±25x10 ⁻⁶ °C; ±50x10 ⁻⁶ °C; ±100x10 ⁻⁶ °C;

● 料号编号 Ordering Information

例 example

STB	100A	25mv	D	C	B
型号 Type	额定电流 Rated Current	额定压降(V) Rated drop	误差值 Tolerance	温度系数 T.C.R	盒装方式 Packing
	250A 300A 400A 500A 600A	25mv	D:±0.5% F:±1%	C3:±25ppm C4:±20ppm C5:±15ppm	B:盒装 Boxes