


TR 功率厚膜电阻 TR Power Thick Film Resistors

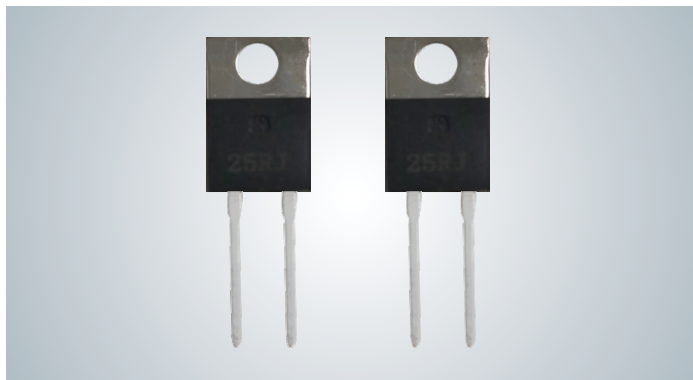

本体颜色: Body Color

标准品: Standard (Black 黑色)

标示: Marking

(根据客户要求提供相应标识)

(According to the customer request to provide corresponding identification)


● 特性 Feature

- I 0.5%精度, 无感设计。
0.5% Tolerance, Non inductance design
- II 大功率, 阻值范围宽。
High power, wide resistance value
- III 方便安装。Easy mounting

● 应用范围 Applications



- I 仪器仪表 Meters and instruments
- II 各种电子设备 All kinds of electrical devices

● 结构图 Construction

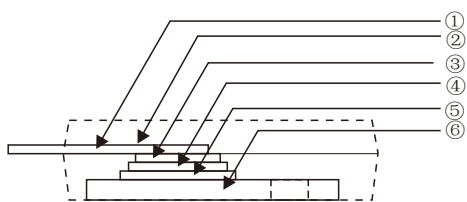

①	镀锡铜线	Leads, Tin plated Cu
②	环氧树脂, UL94-V0	Mold, epoxy, UL94-V0
③	铜导体	Conductor, Cu
④	电阻, NiCr 或 RuO	Resistor, NiCr or RuO
⑤	氧化铝陶瓷基板	Substrate, Alumina
⑥	法兰	Flange, Ni plated Cu

● 尺寸 Dimensions

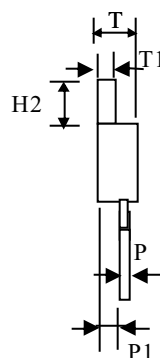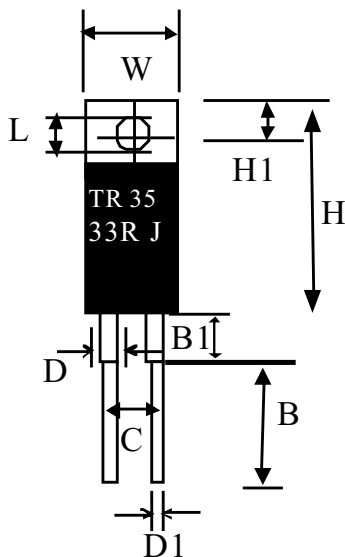

型号 Type	功率 Power	尺寸Dimensions(mm)													
TR 35	35W	W	H	H1	B	B1	D	D1	L	C	T	T1	H2	P	P1
		10.16 ± 0.15	15.2 ± 0.1	2.8 ± 0.05	12.48 ± 0.5	Max:4	1.30 ± 0.03	0.8 ± 0.05	3.80 ± 0.03	5.08 ± 0.03	4.6 ± 0.2	1.25 ± 0.03	6.23 ± 0.38	0.51 ± 0.05	2.0 ± 0.05

● 参考规格Reference Standards

JIS C 5201-1

TR 功率厚膜电阻 TR Power Thick Film Resistors


● 功率、阻值范围与耐电压 Power And Resistance etc

规格 Type	功率(W) Power (25℃)	热阻 (℃/W) Thermal resistance	阻值范围 Resistance Range (Ω)	精度 Tolerance	温度系数 T.C.R	最高使用电压 Max working Voltage	气候类别 Climatic category
TR 35	35	4.5	0.1~1MΩ	±0.5% ±1% ±5%	±50ppm/℃ ±100ppm/℃ ±200ppm/℃ ±300ppm/℃	350V	55/125/56

-压电强度: 1800VAC

-25℃ 常温下,额定功率在2.5W

● 降功耗曲线图 Derating Curve

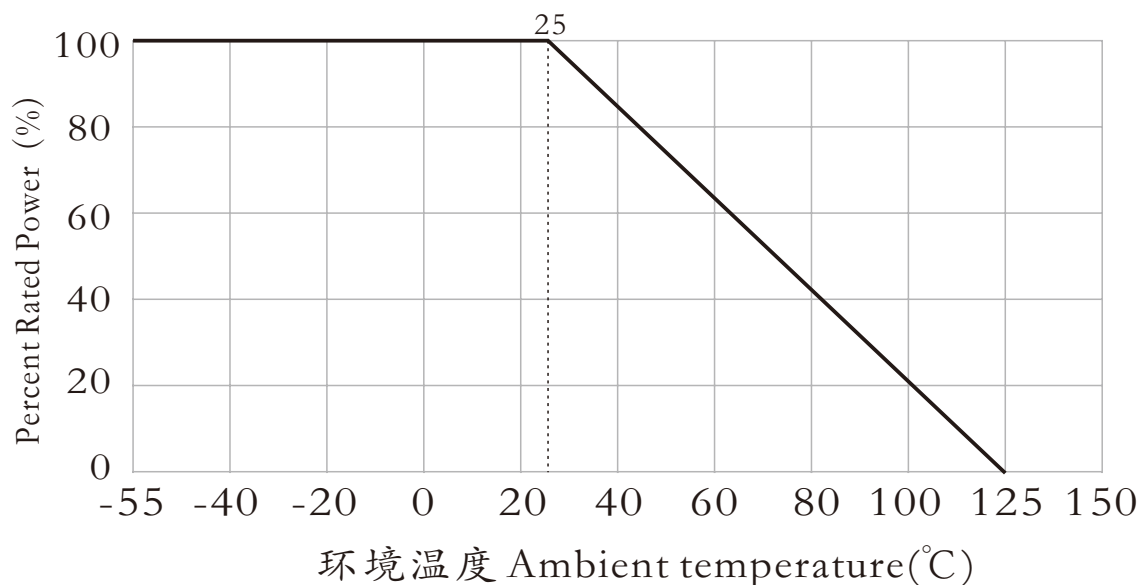

● 性能 Performance

试验项目 Test Items	规格值 Performance Requirements	试验方法 Test Methods(JIS C 5201-1)
短时间过负荷 Short time overload	$\Delta R \leq \pm (0.25\%R + 0.05\Omega)$	2倍额定功率, 施加电压不超过最大连续工作电压的1.5倍, 持续5秒
快速温度变化 Rapid temperature change	$\Delta R \leq \pm (0.25\%R + 0.05\Omega)$	-55℃, 30min/125℃, 30min 5cycles
寿命 Load life	$\Delta R \leq \pm (1\%R + 0.05\Omega)$	15℃ ~ 35℃, P_R , 1000h
稳态湿热 Humidity(steady states)	$\Delta R \leq \pm (1\%R + 0.05\Omega)$	40℃, RH93±3%.56d
气候顺序 Temperature cycling	$\Delta R \leq \pm (1\%R + 0.05\Omega)$	125℃, 16h/55℃, RH93±3%, 24h/-55℃, 2h/15~35℃, 8.5KPa, 1h

● 料号编号 ordering Information

例 example

TR	35	0.5%	10R0	±50ppm	盒装
型号 Type	额定功率 Rated Power	误差值 Tolerance	电阻值 (Ω) Resistance	温度系数 TCR	包装方式 Packaging
	35: 35W	±0.5% ±1% ±5%	10R0=10Ω	±50ppm ±100ppm ±200ppm	盒装 Box

包装说明：包装塑料自封袋包装起订量100只）。

Packaging : Plastic recloseable bags (moq : 100PCS)